

ADDENDUM NO. 3
TO PLANS, SPECIFICATIONS AND CONTRACT DOCUMENTS

TO: ALL PLANHOLDERS AND PROSPECTIVE BIDDERS

FOR: SANITARY & IMPROVEMENT DISTRICT NO. 376
MISSION PARK CREEK STABILIZATION
LRA JOB NO. 0191052.90-384

OWNER: S.I.D. NO. 376 OF DOUGLAS COUNTY, NEBRASKA

ENGINEER: LAMP, RYNEARSON & ASSOCIATES, INC.
14710 WEST DODGE ROAD, SUITE 100
OMAHA, NEBRASKA 68154-2027

DATE: OCTOBER 5, 2011

The following changes, corrections, clarifications and additions shall be made to the Plans, Specifications, and Contract Documents for the above-named project and shall be as binding as if incorporated in the original Contract Documents. The Contractor shall acquaint himself with all aspects of this Addendum.

All other provisions and stipulations of the Contract Documents remain in effect, as originally issued.

The Contractor shall acknowledge receipt of all addenda on the Proposal Form.

The following shall be deleted, modified or added to as follows:

PLANS

Note that the flowable fill option has been removed and that Low Slump Concrete (LSC) will be used. The two 3-inch pipes have been replaced with four 3-inch pipes, and the pipes are to be temporarily tied back to the abutment until after the LSC cures. It will be necessary to remove and reinstall some bridge decking to install the additional pipes and LSC.

Detail Sheet 4 of 4:

Change Detail "East Abutment Repairs" with the Detail found in Attachment 1 and 2, "East Abutment Repairs."

Add new Detail "Section Thru Abutment" as shown in Attachment 3.

Under the "Cut-off Weir & Abutment Repair Notes", replace note #3 with the following:

3. Steel sheet piling shall conform to ASTM A328/A328M or ASTM A857/A857M steel sheet piling, may be cold formed or hot rolled and shall meet the following minimum requirements:

Section Length	10 ft. or 15 ft.
Minimum Section Depth	3.00 in.
Minimum Section Thickness	0.250 in.
Minimum Section Modulus	3.50 in ³ / ft.

The Contractor shall submit for review a shop drawing of the sheet pile layout showing all pertinent dimensions, details and section properties.

CONTRACT DOCUMENTS

Replace reference to "*Non-Irrigated Lawn and Turf Seed*" in the Special Conditions, Page SpC-9, Section F. Permanent Seeding, subparagraph c. with the following:

TURF SEED


Seed Type	Rate Per Acre of Pure Live Seed	
Blackwatch Tall Fescue	96	lbs.
Inferno Tall Fescue	96	lbs.
DaVinci Tall Fescue	96	lbs.
Avenger Tall Fescue	96	lbs.
Exacta II	43	lbs.
With One of the Following:		
Spring Oats (Spring)	40	lbs.
Annual Rye (Summer)	40	lbs.
Winter Wheat (Fall)	40	lbs.
Total Lbs. Pure Live Seed Per Acre	467	lbs.

ENCLOSURE

END OF ADDENDUM

Sincerely,

LAMP, RYNEARSON & ASSOCIATES, INC.

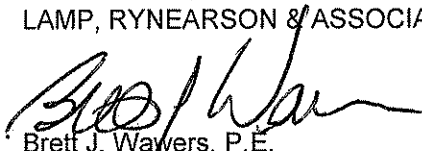

Brett J. Wayers, P.E.
Senior Vice President